

## SSP-1 SUPER SENSOR

### Features

SSP-1 is transom mount sensor with the function of doorway detection.

SSP-1 detects passers-by and/or objects through the usage of reflection of near-infrared ray, and outputs a signal to controller of automatic door operating unit.

SSP-1 has the detection area over the doorway (door track) by memorizing door movement.

Improved safety because of covering the 5 lined detection area including doorway with high-density pattern.




### Specification

SSP-1 SUPER SENSOR	
Detection Method	Near Infrared reflection method (Motion and Presence Detection)
Mounting Height	Max. 3.2m
Detection Area	Max. W 3.5m x D 2.6m [at mounting height 3.2m]
Power Voltage	12V to 110V AC/DC $\pm$ 10%
Current Consumption	3.8VA or less (at 100V AC) 120mA or less (at 12V DC)
Output Ratings	No-voltage relay contact 1a 50V DC 0.1A (resistance load)

### Reference drawing

Dimensions (mm)

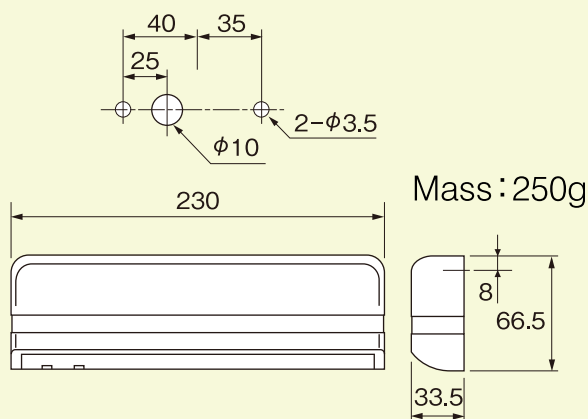

Detection area (mm)

