

APS-(N)1 ADVANCED PROGRAM SWITCH

Features

APS-(N)1 enables automatic sliding door much more convenient to be used.

A program switch provides the most suitable door operation.

Touch panel makes selection of door operation for automatic sliding door easily.

Suitable for surface mounting thanks to low-profile

Passcode programming can prevent unauthorized operation.




Specification

	APS-N1	APS-1
Applicable Controller	NET-DS controller	DS series controller
Power Voltage	12V DC \pm 10%	12V DC \pm 10%
Current Consumption	75mA or less	50mA or less
Security Method	Passcode	Passcode

Reference drawing

Dimensions (mm)

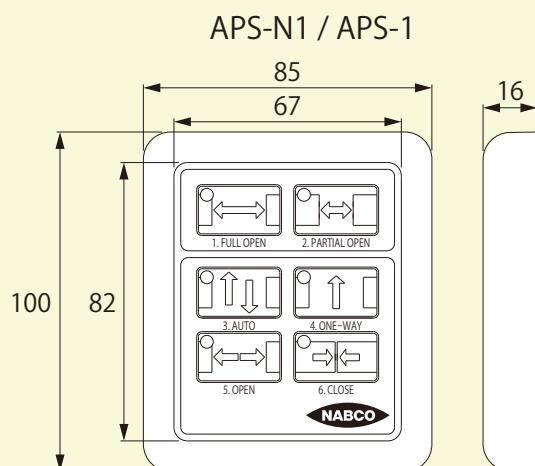

Mass : 270g

Door operation mode

- ① AUTO
The door operates as a normal automatic door.
- ② OPEN
The door opens and holds the full (partial) open position. Useful when moving cargo through the door.
- ③ ONE-WAY
When the door is in a closed position, only the indoor sensor is activated.
- ④ CLOSE
The door closes and all sensors are deactivated.
- ⑤ FULL OPEN
The door operates at the normal opening width.
- ⑥ PARTIAL OPEN
The opening width is partial. Useful in cold weather or during heavy wind / rain conditions.